





**PROTECTS
WHAT IS MOST
PRECIOUS.**



**CEASEFIRE HOME FIRE
EXTINGUISHERS RANGE**

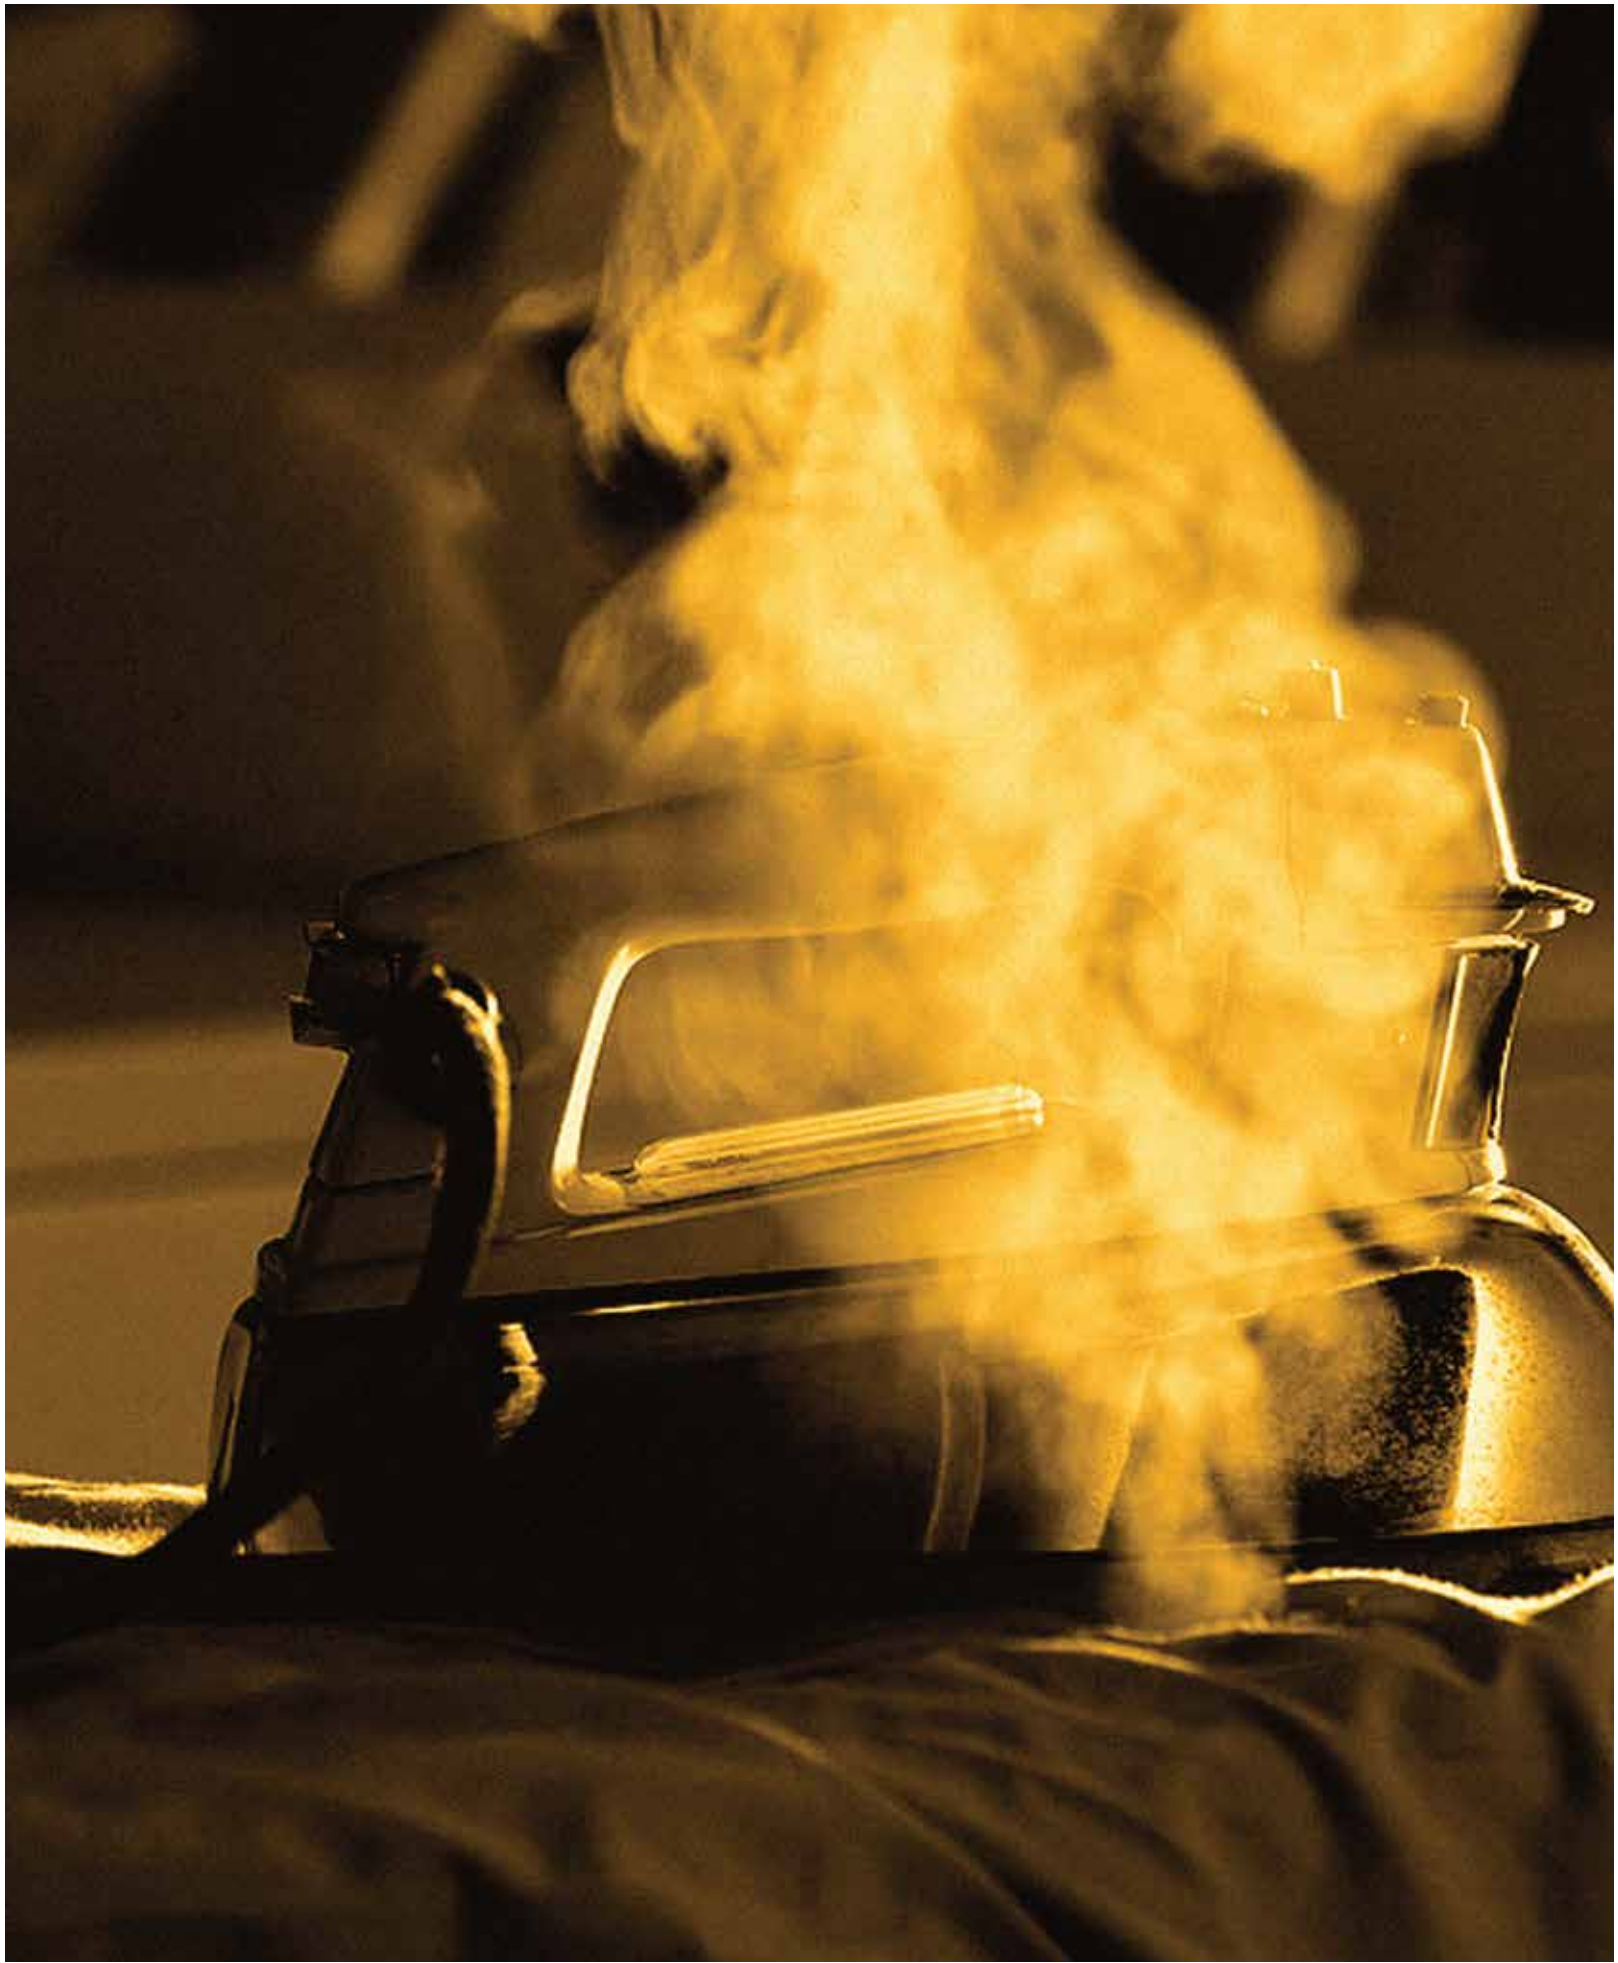



6 MINUTES. THAT'S ALL THE TIME YOU HAVE BEFORE A FIRE GETS OUT OF CONTROL.

That's the same amount of time you have to detect the fire, rush your family to safety and fight the fire.


Packed with modern utilities for a comfortable lifestyle, homes have become extremely prone to fire. A spark in the electrical panel, a short circuit in the air conditioner or heater, an open flame in the mandir, a carelessly tossed matchstick, an unattended stove, a gas leak; these dangers lurk around the walls of our homes at all times.

The fire services are always on hand to help with a fire emergency, but the reality is that given the way our traffic conditions are today, chances are help won't arrive


on time. In most cases, by the time fire tenders reach the scene of fire, they have already lost the six minute window to control fire and prevent damage. Resorting to flooding the area to prevent the fire from spreading, and leaving the home where fire occurred charred and levelled.

The Loss Prevention Association of India (LPA) puts home fires as the second biggest reason for fatal fire incidents in India. A recent report that combines study of data from hospitals and data published by Indian Police puts fire deaths at approximately 1,63,000 each year. About 2% of all deaths every year in India.

As per the National Disaster Response Force and Civil Defence, Ministry of Home Affairs, there is a shortage of 97.59% fire stations, 96.28% fireman and 80.04% Fire Tenders and Rescue vehicles. The NDRF&CD reports high rise residential buildings in metropolitan cities constitute a major fire hazard, and a challenge for the fire departments to reach the top for want of necessary equipment.



Fire grows exponentially

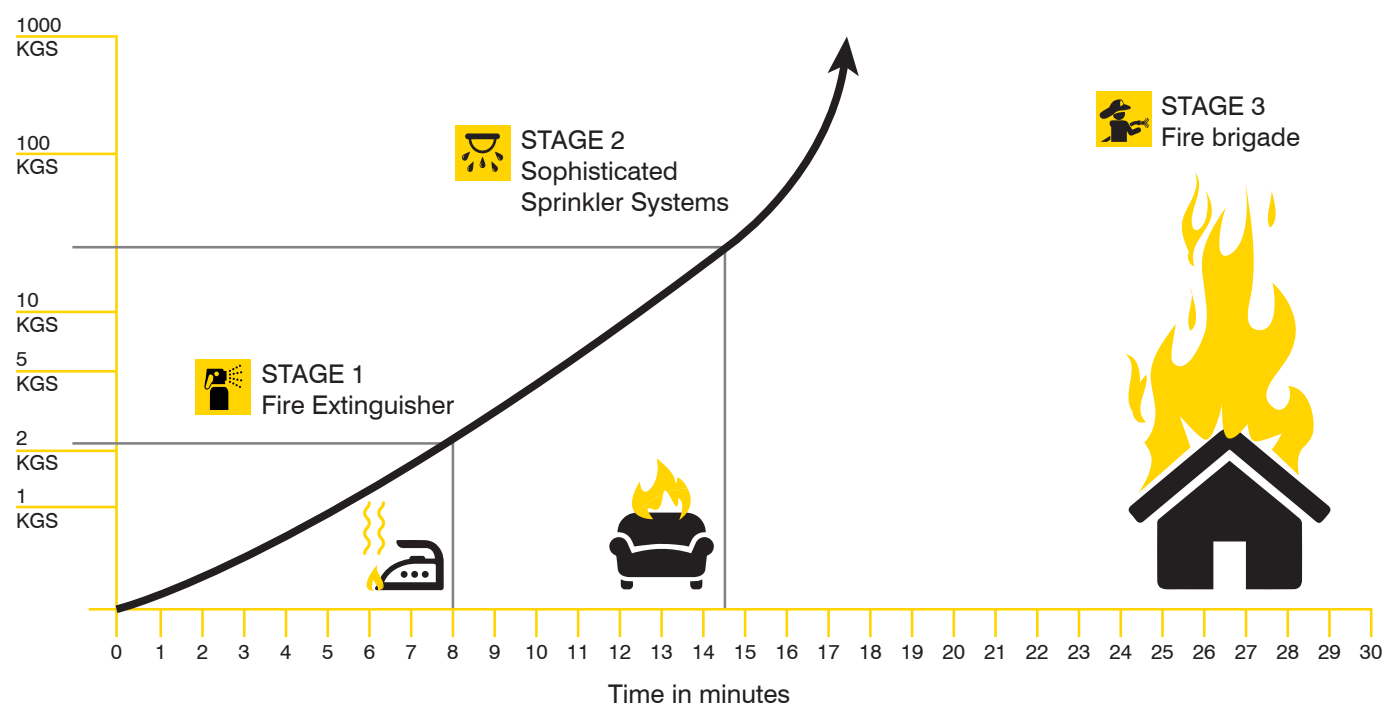

Depending on external help to protect the lives of your loved ones, and save what took you a lifetime to build, is dangerous. That's where **Ceasefire's Home Fire Extinguishers** come in.



FIGHTS CLASS

A B C ⚡

STANDARDS

IS15683 EN3-7 & 8 PED

CERTIFICATIONS



CERTIFYING BODY

 bre 

Ceasefire Home Fire Extinguishers Range

The picture of your parents on the side table. The souvenir from your last vacation. The sofa set you spent hours choosing. We know the time you've spent and the effort you've made to make your house a home, which is why we created masterpieces that complement it, while protecting it.

Designed to match the aesthetics of your home, so that it's not tucked out of sight in a fire situation, Ceasefire's Designer range of extinguishers are art installations of fine stainless steel and ink, crafted to meet international standards and designed to exceed them. Making these extinguishers true works of art. Art that save property and lives.





The Ceasefire Designer Extinguisher uses a combination of mono ammonium phosphate (MAP) and ammonium sulphate, packed into a stainless steel extinguisher. The ABC powder ensures a 90% concentration of MAP is available to fight the flames, maximising the extinguisher's firefighting power.

We've also created a clean agent Designer Extinguisher that fights fire without leaving any residue. Powered by an eco-friendly and powerful extinguishing agent, HCFC 123, this firefighter packs in mega power, and is absolutely safe on sensitive electronic equipment. The lightweight extinguisher is has a powerful throw, to penetrate past the finest grills and meshes.

ENGINEERED TO SAVE LIVES



Unique pressure gauge shows that the extinguisher is ready to use if the needle points to green.

Easy-grip plastic handle

Tamper-proof, easy to pull yellow seal

Precision engineered valve assembly

Rust treated inner cylinder

Epoxy powder coated, outside and inside

Leak-proof, deep drawn steel body

Pilfer-proof bracket



FEATURES *(MAP 90 VARIANT)*



Effective against Class A, B and C as well as Electrical fires:

No matter the fire, the Designer comes to the rescue. The multiple applications of the extinguishing agent help save valuable time while the agent's effectiveness maximises the firefighting power.



Aesthetically Pleasing:

The modern home is driven by aesthetics. Ceasefire's Designer Extinguishers are created to match the aesthetics of your home, while protecting it.



MAP 90:

90% concentration of Mono Ammonium Phosphate maximises the firefighting power of the extinguisher.



Highly Effective:

Built for speed, power and reliability.



Quality Control:

Stringent quality control and multiple point testing systems ensure that when you are faced with a fire, these extinguishers will deliver.



Standards:

Virtually every Ceasefire extinguisher has ISO 9001 and CE certifications, and conforms to ISI standards.



Easy Snap Safety Seal:

A completely tamper-proof safety seal that can be broken in seconds.



Simplicity in Handling:

The easy-grip plastic handle aids simplicity in handling.



Discharge Mechanism:

A simple discharge mechanism allows you to control the discharge and optimise the use of the extinguishing agent.



World Class Quality :

Comes with ISO 9001 and CE certification, and conforms to ISI standards. Comprehensive Helium Tests and Leak Tests also guarantee that the products you buy are manufactured according to the world's most stringent quality standards



Warranty:

The 6 year Warranty means Ceasefire is looking out for the health of your fire safety products.

FEATURES *(HCFC 123 VARIANT)*



The Greenest Extinguisher Ever Built:

It is suitable for use on electric equipment and minimises post fire damage. As a part of Ceasefire's Designer Range, these specially designed extinguishers will blend in well with your stylish interiors.



Aesthetically Pleasing:

The modern home is driven by aesthetics. Ceasefire's Designer Extinguishers are created to match the aesthetics of your home, while protecting it.



Residue-Free:

It leaves no residue making it safe for use on sensitive equipment.



Easy Snap Safety Seal:

A completely tamper-proof safety seal that can be broken in seconds.



Simplicity in Handling:

The easy-grip plastic handle aids simplicity in handling



Pressure Gauge:

The world's smallest and yet remarkably easy to read, this is the only pressure gauge that can be tested onsite, using a special magnet to ensure that it is working perfectly and is 100% accurate.



World Class Quality :

Comes with ISO 9001 and CE certification, and conforms to ISI standards. Comprehensive Helium Tests and Leak Tests also guarantee that the products you buy are manufactured according to the world's most stringent quality standards



Discharge Mechanism:

A simple discharge mechanism allows you to control the discharge and optimise use of the extinguishing agent.



Warranty:

The 6 year Warranty means Ceasefire is looking out for the health of your fire safety products.



Ceasefire Home Fire Extinguishers Range

TECHNICAL SPECIFICATIONS:

NOMENCLATURE FOR PORTABLE FIRE EXTINGUISHER	Fire Ext MAP50 1Kg MS SP Red (Squeeze Grip)	Fire Ext MAP50 1Kg MS SP Red (Gun Housing)	Fire Ext MAP 90-1Kg MS SP Waves	Fire Ext MAP 90-1Kg MS SP Elasticity	Fire Ext MAP90 1Kg MS SP Red (Gun Housing)	MAP 90 Fire Ext. - 1Kg Ivory Texture	MAP 90 Fire Ext. - 1Kg Blue Texture	MAP 90 Fire Ext. - 1Kg Red Texture	MAP 90 Fire Ext. - 1Kg Silver Texture	Fire Ext MAP 90-500Gms MS SP Hexalight	Fire Ext MAP 90-500Gms MS SP Kiterunner	Fire Ext MAP 90-500Gms MS SP Ivory Texture	Fire Ext MAP 90-500Gms MS SP Blue Texture	Fire Ext MAP 90-500Gms MS SP Red Texture	Fire Ext MAP 90-500Gms MS SP Silver Texture
PRODUCT CODE	CF-001137SG	CF-001137	CF-000951	CF-000954	CF-001142	CF-001105	CF-001106	CF-001185	CF-001107	CF-000946	CF-000947	CF-000223	CF-000222	CF-000224	CF-000225
PRESSURE TYPE	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure
EXTINGUISHING AGENT	ABC Powder MAP 50	ABC Powder MAP 50	ABC Powder MAP 90	ABC Powder MAP 90	ABC Powder MAP 90	ABC Powder MAP 90	ABC Powder MAP 90	ABC Powder MAP 90	ABC Powder MAP 90	ABC Powder MAP 90	ABC Powder MAP 90	ABC Powder MAP 90	ABC Powder MAP 90	ABC Powder MAP 90	ABC Powder MAP 90
APPLICABLE ON FIRES	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire	A, B, C, & Electrical Started Fire
IS 15683 RATINGS	1A	1A	NA	NA	1A	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	34B	34B	NA	NA	34B	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
EN 3 RATINGS	5A	5A	5A	5A	5A	5A	5A	5A	5A	NA	NA	NA	NA	NA	NA
	34B	34B	21B	21B	21B	21B	21B	21B	21B	NA	NA	NA	NA	NA	NA
	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
CERTIFICATION STANDARD	EN-3, PED, IS 15683	EN-3, PED, IS 15683	PED	PED	EN-3, PED, IS 15683	PED	PED	PED	PED	PED	PED	PED	PED	PED	PED
CERTIFICATION BODY	LPCB, BIS & EUROCERT	LPCB, BIS & EUROCERT	EUROCERT	EUROCERT	LPCB, BIS & EUROCERT	EUROCERT	EUROCERT	EUROCERT	EUROCERT	EUROCERT	EUROCERT	EUROCERT	EUROCERT	EUROCERT	EUROCERT
GROSS WEIGHT	2.20 to 2.30 kg	2.20 to 2.30 kg	2.20 to 2.30 kg	2.20 to 2.30 kg	2.20 to 2.30 kg	2.20 to 2.30 kg	2.20 to 2.30 kg	2.20 to 2.30 kg	2.20 to 2.30 kg	Approx. 1.45 kg	Approx. 1.45 kg	Approx. 1.45 kg	Approx. 1.45 kg	Approx. 1.45 kg	Approx. 1.45 kg
NET MASS	0.95 to 1.05 kg	0.95 to 1.05 kg	0.95 to 1.05 kg	0.95 to 1.05 kg	0.95 to 1.05 kg	0.95 to 1.05 kg	0.95 to 1.05 kg	0.95 to 1.05 kg	0.95 to 1.05 kg	0.475 to 0.525 kg	0.475 to 0.525 kg	0.475 to 0.525 kg	0.475 to 0.525 kg	0.475 to 0.525 kg	0.475 to 0.525 kg
APPROX. HEIGHT OF FIRE EXT.	350 mm	325 mm	325 mm	325 mm	325 mm	325 mm	325 mm	325 mm	325 mm	265 mm	265 mm	265 mm	265 mm	265 mm	265 mm
DISCHARGE MECHANISM	Squeeze Grip	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered
CAN CONSTRUCTION	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED
VALVE / CAP CONSTRUCTION	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING
INTERNAL COATING	EPOXY POWDER COATING	EPOXY POWDER COATING	NO	NO	EPOXY POWDER COATING	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO
EXTERNAL COATING	EPOXY POLYESTER POWDER COATING	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER COATED & LAMINATED	EPOXY POLYESTER POWDER COATED & LAMINATED	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER COATED & LAMINATED	EPOXY POLYESTER POWDER COATED & LAMINATED	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER
HELIUM LEAK DETECTION TESTING	NO	NO	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
WARRANTY IN YEARS	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
APPROX. GUN WEIGHT IN KG	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
WORKING PRESSURE	15Bar	15Bar	15Bar	15Bar	15Bar	15Bar	15Bar	15Bar	15Bar	15Bar	15Bar	15Bar	15Bar	15Bar	15Bar
DIA. OF SHELL (OD)	86.5 mm	86.5 mm	86.5 mm	86.5 mm	86.5 mm	86.5 mm	86.5 mm	86.5 mm	86.5 mm	74.5 mm	74.5 mm	74.5 mm	74.5 mm	74.5 mm	74.5 mm
OPERATING TEMPERATURE	-30°C to +55°C	-30°C to +55°C	-30°C to +55°C	-30°C to +55°C	-30°C to +55°C	-30oC to +60oC	-30oC to +60oC	-30oC to +60oC	-30oC to +60oC	-30oC to +60oC	-30oC to +60oC	-30oC to +60oC	-30oC to +60oC	-30oC to +60oC	-30oC to +60oC
HYDROSTATIC TEST PRESSURE	35Bar	35Bar	35Bar	35Bar	35Bar	35Bar	35Bar	35Bar	35Bar	35Bar	35Bar	35Bar	35Bar	35Bar	35Bar
CYLINDER MATERIAL SPEC.	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)
BODY THICKNESS	1.6mm	1.6 mm	1.6 mm	1.6 mm	1.6mm	1.6 mm	1.6 mm	1.6 mm	1.6 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm

TECHNICAL SPECIFICATIONS:

NOMENCLATURE FOR PORTABLE FIRE EXTINGUISHER	Fire Ext HCFC123-500Gms MS SP Red Texture	Fire Ext HCFC123-500Gms MS SP Ivory Texture	Fire Ext HCFC123-500Gms MS SP Blue Texture	Fire Ext HCFC123-500Gms MS SP Silver Texture	Fire Ext HCFC123-1Kg MS SP Red Texture	Fire Ext HCFC123-1Kg MS SP Ivory Texture	Fire Ext HCFC123-1Kg MS SP Blue Texture	Fire Ext HCFC123-1Kg MS SP Silver Texture	Fire Ext HCFC123-1Kg MS SP Red
PRODUCT CODE	CF-000228	CF-000227	CF-000226	CF-000229	CF-000236	CF-000235	CF-000234	CF-000237	CF-001184
PRESSURE TYPE	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure	Stored Pressure
EXTINGUISHING AGENT	HCFC-123	HCFC-123	HCFC-123	HCFC-123	HCFC-123	HCFC-123	HCFC-123	HCFC-123	HCFC-123
APPLICABLE ON FIRES	A, B, & Electrical Started Fire	A, B, & Electrical Started Fire	A, B, & Electrical Started Fire	A, B, & Electrical Started Fire	A, B, & Electrical Started Fire	A, B, & Electrical Started Fire	A, B, & Electrical Started Fire	A, B, & Electrical Started Fire	A, B, & Electrical Started Fire
IS 15683 RATINGS									
EN 3 RATINGS									
CERTIFICATION STANDARD	PED	PED	PED	PED	PED	PED	PED	PED	PED
CERTIFICATION BODY	EUROCERT	EUROCERT	EUROCERT	EUROCERT	EUROCERT	EUROCERT	EUROCERT	EUROCERT	EUROCERT
GROSS WEIGHT	Approx. 1.45 kg	Approx. 1.45 kg	Approx. 1.45 kg	Approx. 1.45 kg	Approx. 2.30 kg	Approx. 2.30 kg	Approx. 2.30 kg	Approx. 2.30 kg	Approx. 2.30 kg
NET MASS	0.475 to 0.500 kg	0.475 to 0.500 kg	0.475 to 0.500 kg	0.475 to 0.500 kg	0.95 to 1.00 kg	0.95 to 1.00 kg	0.95 to 1.00 kg	0.95 to 1.00 kg	0.95 to 1.00 kg
APPROX. HEIGHT OF FIRE EXT.	265 mm	265 mm	265 mm	265 mm	350 mm	350 mm	350 mm	350 mm	350 mm
DISCHARGE MECHANISM	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered	Thumb Triggered
CAN CONSTRUCTION	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED	DEEP DRAWN AND MIG WELDED
VALVE / CAP CONSTRUCTION	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING	FORGING AND MACHINING
INTERNAL COATING	NO	NO	NO	NO	NO	NO	NO	NO	NO
EXTERNAL COATING	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER	EPOXY POLYESTER POWDER
HELIUM LEAK DETECTION TESTING	YES	YES	YES	YES	YES	YES	YES	YES	YES
WARRANTY IN YEARS	6	6	6	6	6	6	6	6	6
APPROX. GUN WEIGHT IN KG	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
WORKING PRESSURE	10Bar	10Bar	10Bar	10Bar	10Bar	10Bar	10Bar	10Bar	10Bar
DIA. OF SHELL (OD)	74.5 mm	74.5 mm	74.5 mm	74.5 mm	86.5 mm	86.5 mm	86.5 mm	86.5 mm	86.5 mm
OPERATING TEMPERATURE	-30 °C to 60°C	-30 °C to 60°C	-30 °C to 60°C	-30 °C to 60°C	-30 °C to 60°C	-30 °C to 60°C	-30 °C to 60°C	-30 °C to 60°C	-30 °C to 55°C
HYDROSTATIC TEST PRESSURE	35Bar	35Bar	35Bar	35Bar	35Bar	35Bar	35Bar	35Bar	35Bar
CYLINDER MATERIAL SPEC.	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)	Steel CR2(DC01)
BODY THICKNESS	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.6 mm	1.6 mm	1.6 mm	1.6 mm	1.6 mm

DESIGNER SERIES

THE CLASSIC RANGE



The Classic Designer Series extinguishers
are available in a choice of four colours:
Beige, Matte Red, Metallic Grey or Blue
to match your interiors.


DESIGNER SERIES

THE ART RANGE



CEASEFIRE TODAY

360° lifesaving fire and safety solutions. Extensive investments in R&D with 400 revolutionary lifesaving products that span from detection to security to suppression systems to total green solutions. Over 2,00,00 customers. Over 3,000 new customers getting added every month. A presence in over 300 cities and towns. A product sold every 61 seconds. A life saved every 9 minutes. We're equipped and ready to protect you.

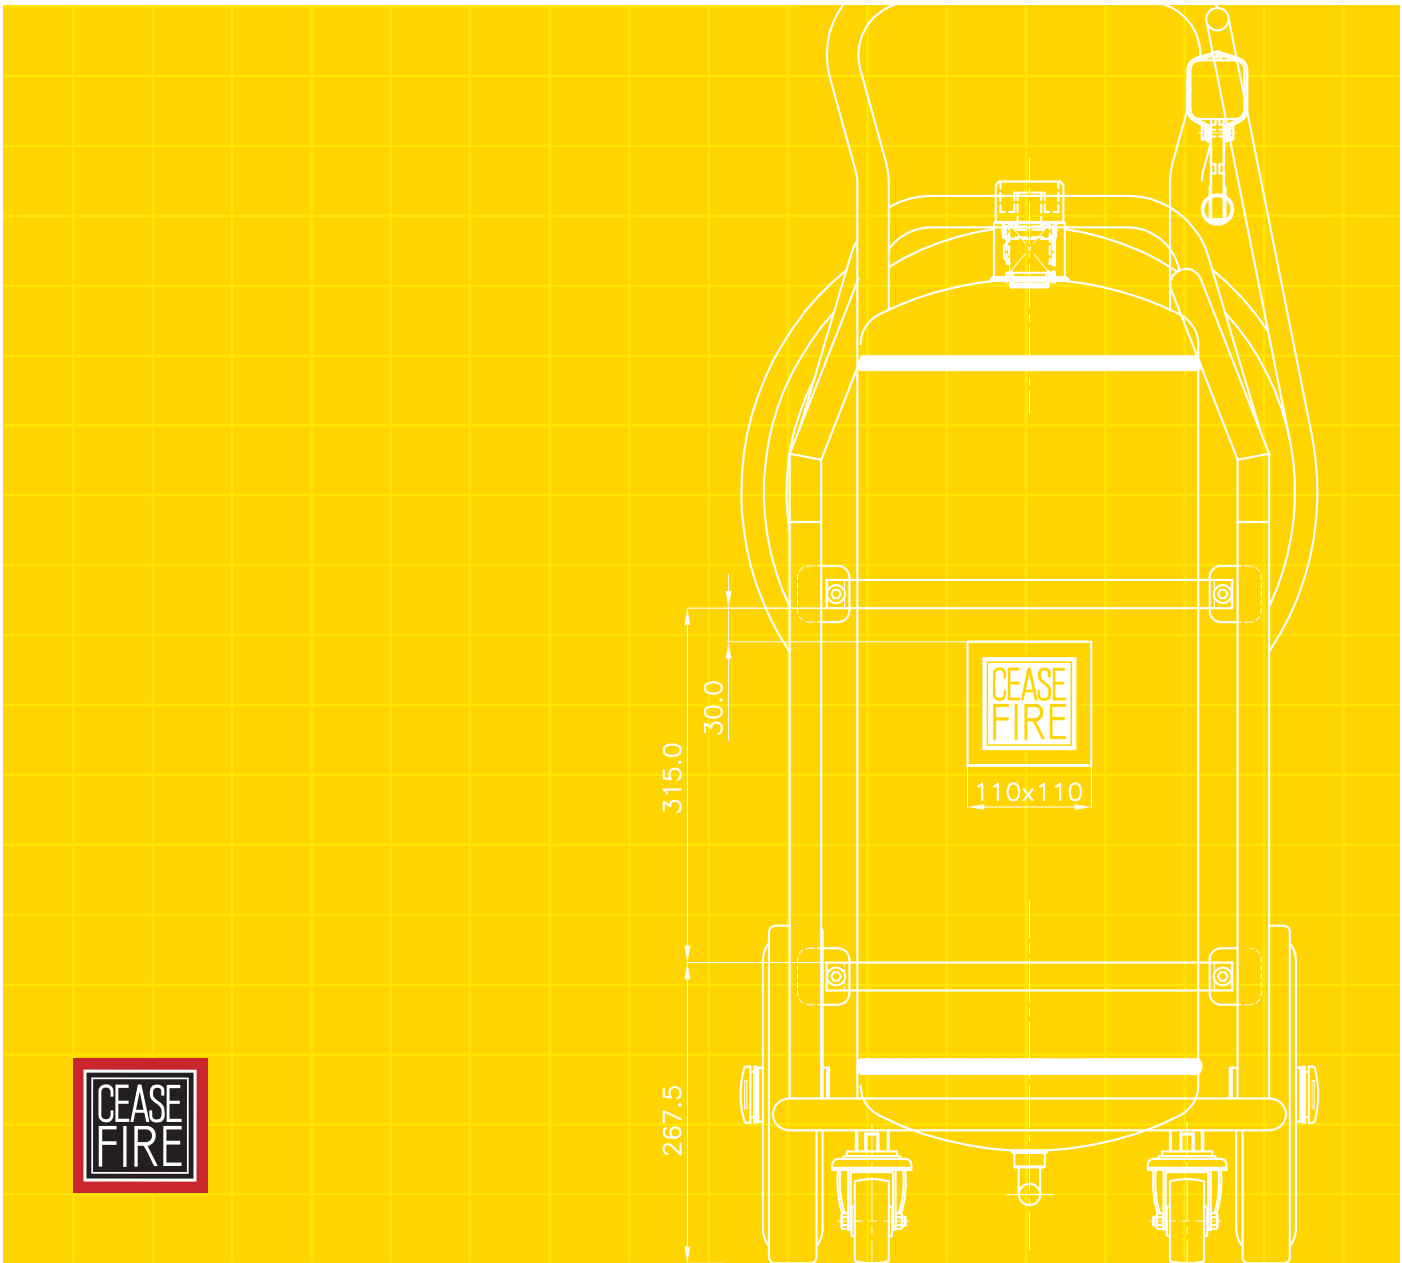



Download the Ceasefire app.



Ceasefire Industries Private Limited,
Plot No. 4, Second Floor, Sector - 135,
Noida - Greater Noida Expressway,
Noida - 201 301, Uttar Pradesh (India)
t +91 120 4665800

Call our Free Hotline :
1800 120 3473 / +91 9540 666 666
or call +91 120 4223473

www.ceasefire.in

Follow us on:

